

Low Loaders



- 6T payload
- 50mm softwood sheeted floor
- Spring assisted ramps as standard
- Lockable steel toolbox
- Durbar sheeted beavertail with grip bars
- Standard 700mm (2`4" wide) ramps
- Steel strap ramp supports
- Rope hooks and chime bars standard
- Galvanised drawbar boot & toolbox door.
- Hydraulic Brakes
- Park brake
- LED lights to rear
- Fixed drawbar
- Hose Stowage
- Fixed towing Eye



- Up to 16T payload
- 50mm softwood sheet floor
- Spring assist ramps as standard
- Lockable steel toolbox
- Durbar sheeted beavertail with grip bars
- Standard 700mm (2'4" wide) ramps
- Steel strap ramp supports
- Rope hooks and chime bars standard
- Galvanised drawbar boot & toolbox door.
- Hydraulic Brakes
- Park brake
- LED lights to rear including number plate light
- Sprung drawbar standard
- Hose Stowage
- Fixed towing Eye
- 215/75/17.5 Twin Wheels





- GVW up to 33T
- 50mm softwood sheet floor
- Spring assist ramps as standard
- Lockable steel toolbox
- Durbar sheeted beavertail with grip bars
- Standard 700mm (2'4" wide) ramps
- Steel strap ramp supports
- Rope hooks and chime bars standard
- Galvanised drawbar boot & toolbox door.
- Hydraulic Brakes
- Park brake
- LED lights to rear including number plate
- Sprung drawbar
- Hose Stowage
- Fixed towing Eye



- 27T gross weight (3 axle)
- 35T gross weight (4 axle)
- Optional 32T gross version (3 axle)
- Heavy duty wheel arches c/w grip bars
- Hydraulic brakes
- Full LED road lights
- Fixed towing eye
- Front & rear loading ramps
- Chime bar tie points
- Plated H-Beam fabricated chassis



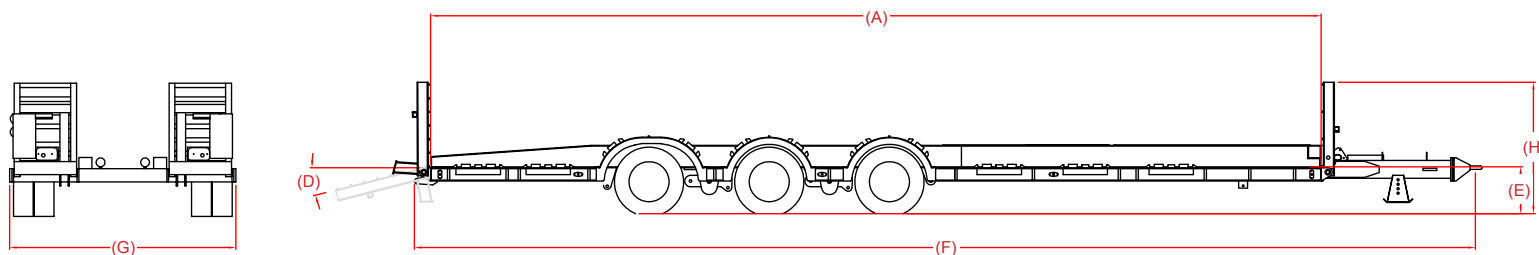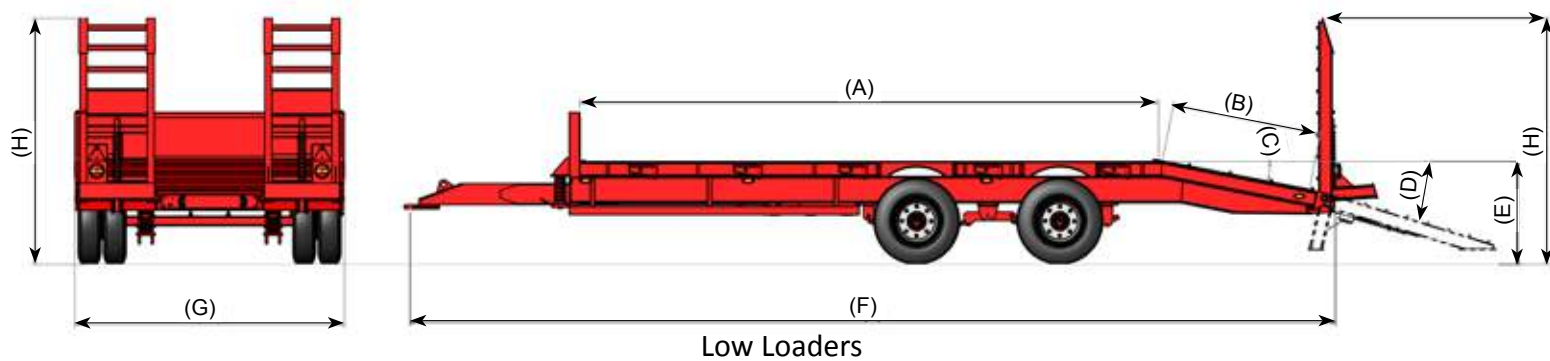

Forestry trailer

	MODEL	Bed size (includes headboard) (A)	Beavertail (B)	Beavertail Angle (C)	Ramps (spring assisted)	Ramp Angle (D)	Floor height (E)	Max Length (F)	Width (G)	Height With Ramps (H)	Chassis	Axle	Brakes (Hydraulic)	Drawbar	Slack Adjusters	Tyres
Single Axle	6 T	3.99m x 2.14m 13' x 7'	1.26m (4')	16°	1.52m x 0.71 (5' x 2'4")	17°	0.91m (36")	7.28m	2.14m	2.01m	200x75x23 RSC	70mm 6-stud	300x60	Fixed	No	2 off 400/60-15.5
Tandem Axle	9 T	4.61m x 2.286m (15' x 7'6")	1.51m (5')	14°	1.7m x 0.71 (5'7" x 2'4")	15°	0.94m (37")	8.16m	2.286m	2.2m	200x75x23 RSC plated	70mm 6-stud	300x60	Sprung	No	4 off 400/60-15.5
	9 T	4.61m x 2.286m (15' x 7'6")	1.52m (5')	11°	1.7m x 0.71 (5'7" x 2'4")	16°	0.86m (34")	8.16m	2.286m	2.2m	200x75x23 RSC plated	70mm 6-stud	300x60	Sprung	No	4 off 235/75-R17.5
	16 T	5.49m x 2.54m (18' x 8'4")	1.52m (5')	11°	1.7m x 0.71 (5'7" x 2'4")	17°	0.9m (35")	9.1m	2.54m	2.24m	254x146x31 H-Beam	90mm 8-stud Tandem axle	300x90	Sprung	Yes	8 off 215/75-R17.5
Tridem Axle	22 T	6.09m x 2.54m (20' x 8'4")	1.52m (5')	11°	1.7m x 0.71 (5'7" x 2'4")	17°	0.9m (35")	9.1m	2.54m	2.24m	254x146x31 H-Beam	90mm 8 stud	300x90	Sprung	Yes	12 off 215/75-R17.5
	25 T	6.09m x 2.54m (20' x 8'4")	1.52m (5')	11°	1.7m x 0.71 (5'7" x 2'4")	17°	0.91m (36")	9.1m	2.54m	2.25m	254x146x31 H-Beam	100mm 8 stud	300x90	Sprung	Yes	12 off 215/75-R17.5
	28 T	6.09m x 2.54m (20' x 8'4")	1.52m (5')	11°	1.7m x 0.71 (5'7" x 2'4")	17°	0.9m (35")	9.1m	2.54m	2.25m	Fabricated chassis	100mm 8 stud	300x135	Sprung	Yes	12 off 215/75-R17.5
	30 T	6.09m x 2.54m (20' x 8'4")	1.52m (5')	11°	1.7m x 0.71 (5'7" x 2'4")	17°	0.91m (36")	9.1m	2.54m	2.265m	Fabricated chassis	100mm 8 Stud	300x135	Sprung	Yes	12 off 215/75-R17.5
	Forestry 27 T	10m x 2.54m (32'10 x 8'4")	N/A	N/A	1.05m x 0.71m (3'5" x 2'4")	20°	0.52m (20")	12.16m	2.54m	1.48m	254x146x31 H-Beam plated	100mm 8 Stud c/w Rear Steer	300x90	Sprung	Yes	12 off 215/75-R17.5
4- Axle (not for use on public roads in the EU)	Forestry 35 T (Gross)	11m x 2.54m (36' x 8'4")	N/A	N/A	1.05m x 0.71m (3'5" x 2'4")	20°	0.52m (20")	13.16m	2.54m	1.48m	254x146x31 H-Beam plated	100mm 8 Stud c/w 3rd & 4th Axles Steering	300x135	Sprung	Yes	16 off 215/75-R17.5

Please note: Imperial dimensions are rounded to the nearest foot or inch

Options



**Bolt-On Bale Wedge
(Cheese Wedge)**



Wedge Ramp



6ft Steel Tool Box



Track Guides



Double T Bar Headboard



Floor Hook



**Headboard Outrigger
Storage Tray**



Durbar Sheeted ramps



Mantis Ramps



Pull out marker board



Hydraulic Jack



Forestry outriggers



Rear Tow hitch



Swing Outriggers



Rear steering axle

Common Options

BRAKES

Dual Air/Hydraulic Brakes
Air only brakes
Load sensing air or Hydraulic
Cable Operated breakaway system
NC Electric Operated breakaway system
ABS complete with Susie
Automatic Slack Adjusters

SUSPENSION

Air suspension c/w raise/lower valve
Fabricated chassis

WHEELS

Various wheel alternatives available

AXLES

8 stud high speed
10 stud high speed

FLOOR

Longer Bed
Hardwood floor
Floor Hooks
Flatbed with no Beavertail or ramps (same overall length)
1.35m Wide bucket well in tail

OUTRIGGERS

Swing out outriggers on bed or beavertail
Outrigger Storage Tray c/w Boards
Pull out markerboards c/w dual LED lights (4 off)

RAMPS

Hydraulically Operated Ramps (all widths)
Wider Ramps
Wood Sheeted Ramps
Wedge Ramps
Mantis Flip-toe Ramps
2.2m Long Ramp

OTHER

Bolt-On Bale Cheese wedge (Steel)
Adjustable Height towing eye
Rear Tow Hitch
Front Bale Rack
Double T-bar Headboard
Track Guides
Post holes
4 off Twist Locks

Revision.03 – March 2019

In accordance with our policy of continued development we reserve the right to alter specification and design without notice.



NC Engineering (Hamiltonsbawn) Ltd
2 Killyrudden Road
Hamiltonsbawn
Co.Armagh
Northern Ireland
BT61 9SF

Tel: +44 (0) 28 38 871970
Fax: +44 (0) 28 38 870362
Email: sales@nc-engineering.com
www.nc-engineering.com

